PRODUCT NEWS
MORE STABLE BOOM SYSTEM

STEINDL-PALFINGER STEPA










STEPA sets new standards


- 11m forestry crane with double telescopic system
- new completely redesigned boom system
  - internal larger rope and hose routing
  - adjustable slide pads
  - wider and more stable boom system
  - fully foldable knuckle boom system

Follow us

STEPA Farmkran GmbH • Christophorusstraße 28 • A-5061 Elsbethen • T: +43 662/636 404 • E: office@stepakran.com • www.stepakran.com

FORESTRY CRANE
L-CRANE 9.6 M REACH

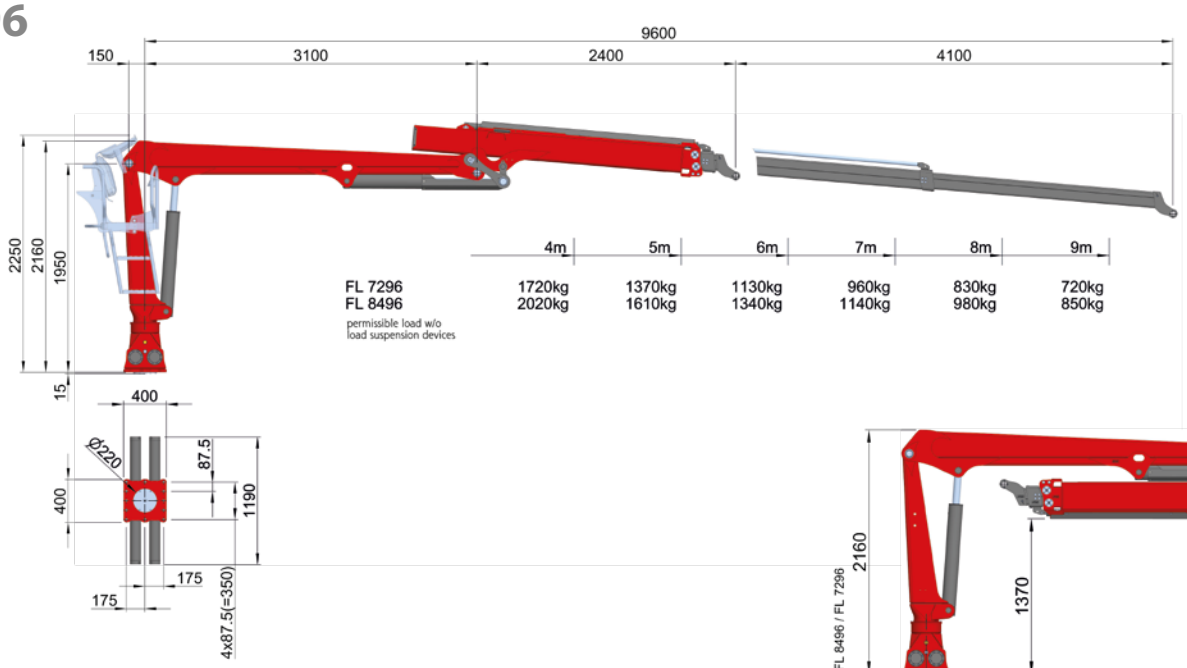

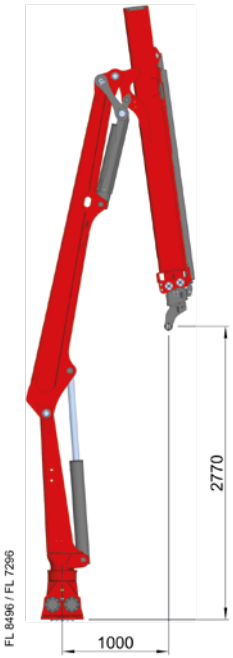



FL Technical Data		7296	8496
lifting torque, net	[kNm]	71	82
slewing torque, net	[kNm]	20	23
slewing range	[°]	340	
weight with 8-fold slider w/o grabber	[kg]	1200	1220
maximum operating pressure	[bar]	210	240
pump flow rate, recommended	[l/min]	1x70 / 2x45	
recommended timber grabber		FG 160S	

improved hose & telescopic cylinder protection



FORESTRY CRANE
L-CRANE 11,0 M REACH

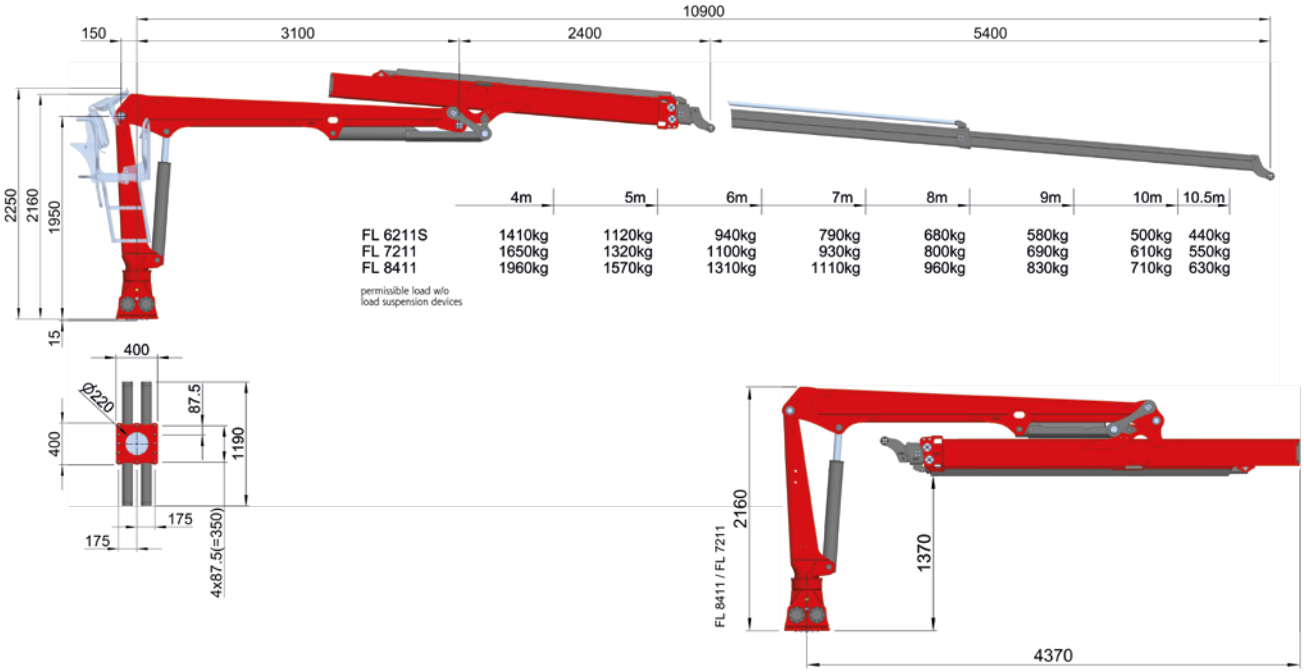

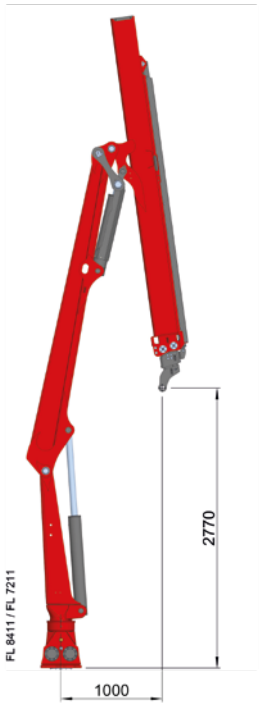



FL Technical Data		6211S	7211	8411
lifting torque, net	[kNm]	58	67	78
slewing torque, net	[kNm]	22	20	23
slewing ranger	[°]		340	
weight with 8-fold slider w/o grabber	[kg]	1230	1280	1300
maximum operating pressure	[bar]	225	210	240
pump flow rate, recommended	[l/min]	1x55 / 2x35	1x70 / 2x45	
recommended timber grabber		FG 160S		





11m forestry crane with double telescopic system

FORESTRY CRANE
Z-CRANE 10,0 M REACH

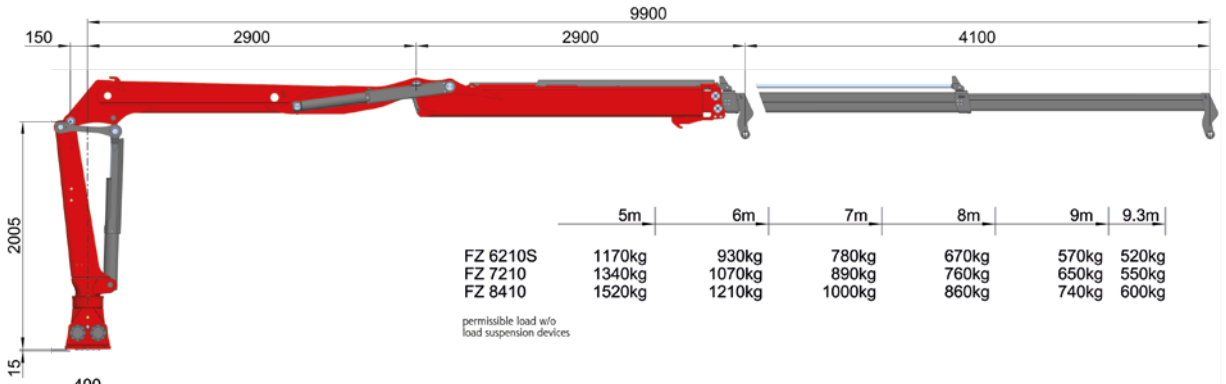



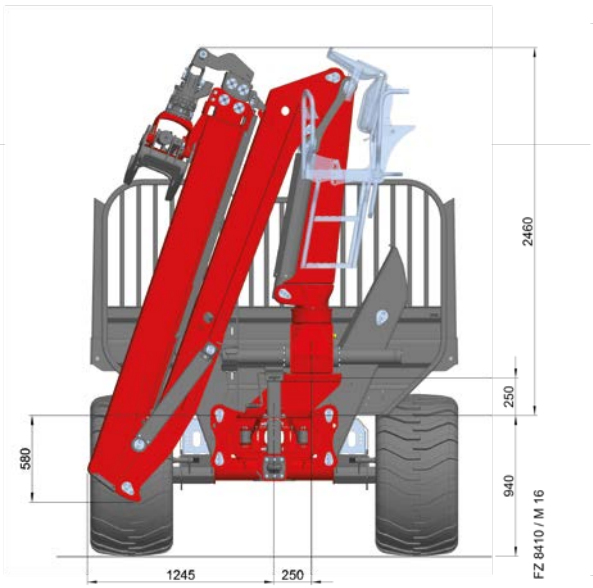

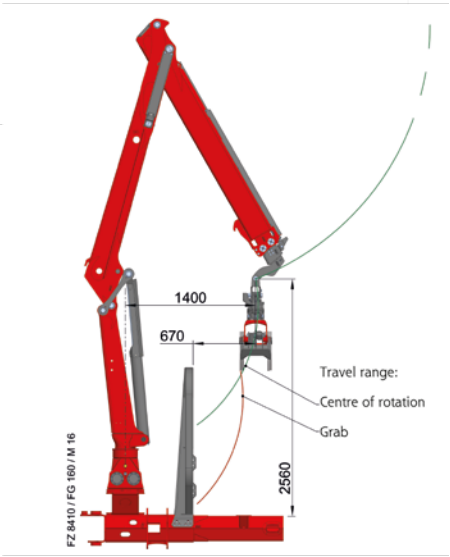

FZ Technical Data		6210S	7210	8410
lifting torque, net	[kNm]	58	68	78
slewing torque, net	[kNm]	21	23	
slewing range	[°]	340		
weight with 8-fold slider w/o grabber	[kg]	1150	1180	1200
maximum operating pressure	[bar]	220	245	270
pump flow rate, recommended	[l/min]	1x55 / 2x40		1x70 / 2x45
recommended timber grabber		FG 160S		



